

SPACE-RAY®

LRU/LRL-HB 'Herringbone' Linked Flue System

Part L 2010 compliant

- Six input ratings: 15kW to 47kW available in Linear and 'U' models
- 'Herringbone' manifold links multiple heaters and flues via a single exhaust fan and outlet
- Heat treated Aluminised Calorised emitter tube surface - for flake free and cleaner working environment
- Natural Gas and Propane
- Aluminium reflectors - the tested and proven superior material - designed to maximise downward radiant heating effect
- Lightweight construction - 4" tubes supplied in 3m sections - easy to assemble and fit
- CE Approved
- Purpose designed radiant heating system for efficient, cost saving heating and coverage of large floor areas
- Made in the UK under our ISO9001:2008 quality assured system - all units test fired before despatch

www.spaceray.co.uk




SPACE-RAY® Heating Systems



| SPECIFICATION GUIDE - LRU/LRL-HB SERIES PART L 2010 COMPLIANT | | | | | | | | | | | | |
|---|--|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Model No. | LRU 15-HB | LRU 25-HB | LRU 30-HB | LRU 35-HB | LRU 40-HB | LRU 45-HB | LRL 15-HB | LRL 25-HB | LRL 30-HB | LRL 35-HB | LRL 40-HB | LRL 45-HB |
| Heat Input, kW Hs | 15.0 | 23.0 | 29.2 | 34.5 | 42.2 | 47.0 | 15.0 | 23.0 | 29.2 | 34.5 | 42.2 | 47.0 |
| Heat Input, kW Hi | 13.5 | 20.7 | 26.3 | 31.1 | 38.0 | 42.3 | 13.5 | 20.7 | 26.3 | 31.1 | 38.0 | 42.3 |
| Length mm - A | 3100 | 5385 | 5510 | | 6970 | | 5230 | 10065 | 9955 | | 13000 | |
| Width mm - B | 460 | | 715 | | | | 460 | 340 | | | | |
| Height mm - C | 175 | | 210 | | | | 175 | 180 | | | | |
| Weight Kg | 29 | 47 | 66 | | 81 | | 25 | 46 | 62 | | 79 | |
| Gas Connection | R - 1/2 | | | | | | | | | | | |
| Supply Pressure | Natural Gas - 20mbar Propane - 37mbar | | | | | | | | | | | |
| Electrical Supply | 230v~50Hz 125W, Current rating 0.55A, fuse externally 3A | | | | | | | | | | | |
| Air Inlet Connection | 101.6mm Dia. | | | | | | | | | | | |

| RECOMMENDED MOUNTING HEIGHT RANGE (General guidance only) | | | | | | |
|---|---------------|---------------|---------------|---------------|---------------|---------------|
| Model No. | LRU/LRL 15-HB | LRU/LRL 25-HB | LRU/LRL 30-HB | LRU/LRL 35-HB | LRU/LRL 40-HB | LRU/LRL 45-HB |
| Horizontal m | 2.4 - 6.0 | 3.0 - 8.0 | 3.8 - 10.0 | 4.0 - 12.5 | 4.8 - 13.5 | 5.6 - 15.0 |
| Angled > 30° m | 2.1 - 4.5 | 2.7 - 5.0 | 3.3 - 7.0 | 3.7 - 8.0 | 4.0 - 9.0 | 4.8 - 11.0 |

| MINIMUM CLEARANCES TO COMBUSTIBLE MATERIAL - MM | | | | | | |
|---|------|-------|-------|-----|-------|------|
| Model No. | SIDE | ABOVE | BELOW | END | FRONT | REAR |
| LRU/LRL-HB 15 | 450 | 450 | 1220 | 450 | 575 | 305 |
| LRU/LRL-HB 25 | 510 | 450 | 1220 | 510 | 610 | 305 |
| LRU/LRL-HB 30 - 45 | 760 | 610 | 2285 | 610 | 760 | 380 |

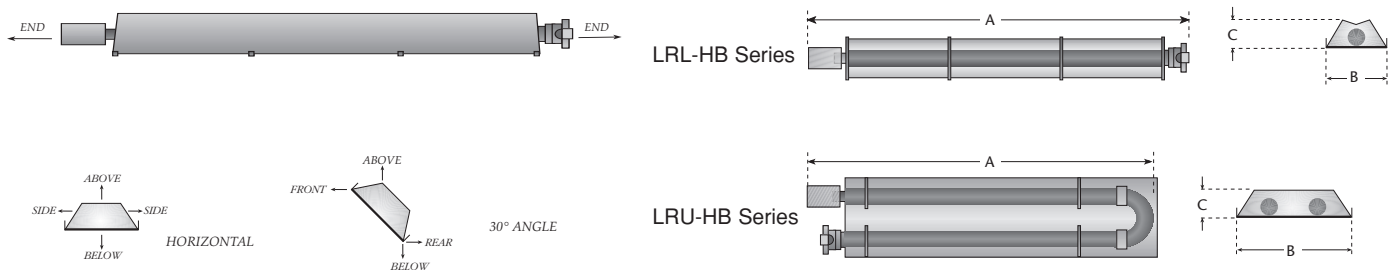

For more information contact:

Distributor/Agent:

Gas Fired Products (UK) Ltd, Chapel Lane, Claydon, Ipswich, Suffolk IP6 0JL UK
Telephone: (01473) 830551 Fax: (01473) 832055 Email: info@spaceray.co.uk Website: www.spaceray.co.uk

We reserve the right to alter specifications without prior notice.

FACTORIES: ■ IPSWICH, ENGLAND ■ CHARLOTTE, N.C., U.S.A.