



# SPACE-RAY

## RADIANT TUBE HEATING


'U' Tubes

## Double Linear Radiant Tube Heaters

### Our Innovation

In 1968 **SPACE-RAY** invented and developed the unitised low intensity radiant tube heater. As part of our target to maximise radiant output, we combined calorised aluminised emitter tubes with highly efficient aluminium reflectors and began a revolution in the space heating industry.

Linear Tubes

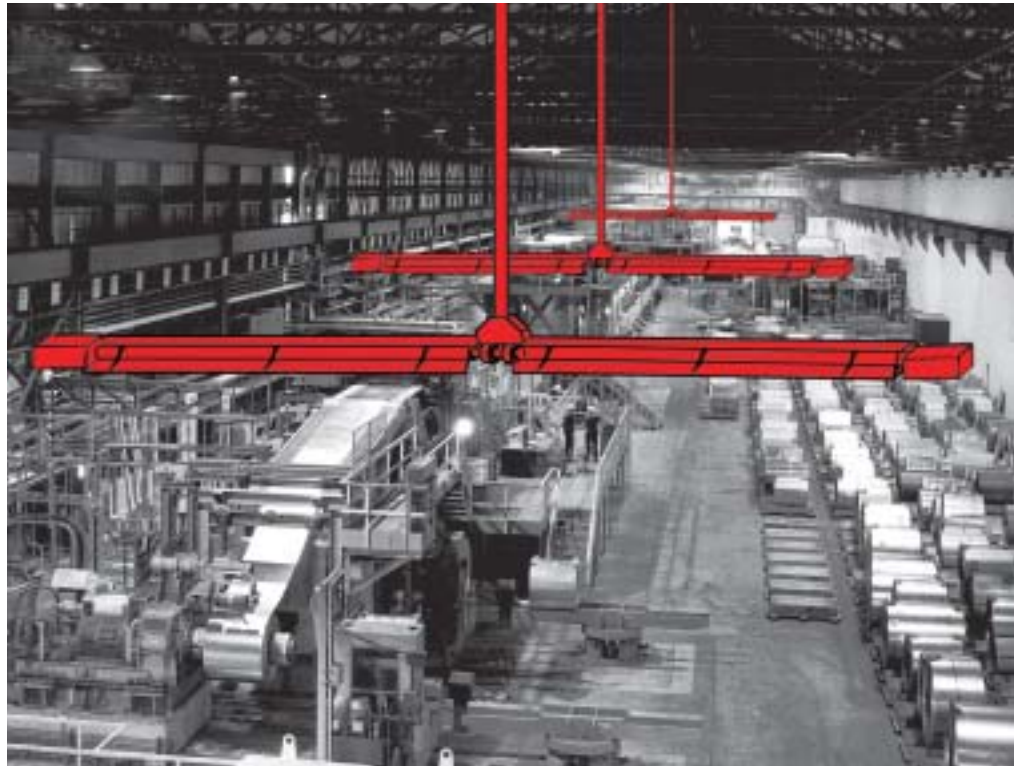

Double  
Linear Tubes

Herringbone  
Linked Flue  
System

### Power of two heaters - Convenience of one flue

- Made in the UK under our ISO 9002 quality assured system - all units test fired before despatch.
- Heat treated Aluminised Calorised emitter tubes - highly radiant absorptive internally and highly radiant emissive externally - maximum radiant efficiency.
- Flake free emitter tube surface - for safer and cleaner working environment.
- Aluminium reflectors - the tested and proven superior material designed to maximise downward radiation.
- 5 year emitter tube guarantee.
- Lightweight construction - easy assemble and fit.
- Suction operation for increased efficiency and ease of venting - vertical or horizontal.
- Mounting heights from 2.1m to 15m.

Radiant  
Plaques



## SPECIFICATION GUIDE

### Double Linear Radiant Tube Heaters

Model	SRDL09	SRDL12	SRDL15	SRDL25	SRDL30	SRDL35	SRDL40	SRDL45
Input Rating kW	18.0	22.8	30.0	46.0	58.4	69.0	84.4	94.0
Overall Dimensions								
Length	10934mm	10934mm	10934mm	20078mm	19858mm	19858mm	25948mm	25948mm
Width	340mm							
Height	392mm							
Heater Weight	60kg	60kg	60kg	92kg	124kg	124kg	158kg	158kg
Gas Connection	Rc 1/2" BSP Internal							
Supply Pressure	Nat Gas - min 17 mbar, max 25 mbar: Propane - min 25 mbar, max 45 mbar Butane - min 20 mbar, max 35 mbar							
Electrical Supply	230V-50Hz 125W, Current rating 0.74A, Fuse externally (each burner) 3A							
Flue Connection	All Models - 150mm							
Min Flue Diameter	125mm			150mm				
Minimum clearance from combustibles								
Model	Side	Above	Below	End	Front	Rear		
SRDL 09/12/15	450mm	450mm	1220mm	450mm	575mm	305mm		
SRDL 25	510mm	450mm	1220mm	510mm	610mm	305mm		
SRDL 30/35/40/45	760mm	610mm	2285mm	610mm	760mm	380mm		
Recommended Mounting Height Range (General guidance only)								
Model	SRDL09	SRDL12	SRDL15	SRDL25	SRDL30	SRDL35	SRDL40	SRDL45
Horizontal	2.5m-6.0m	2.5m-6.0m	2.5m-6.0m	3.0m-8.0m	3.8m-10.0m	4.0m-12.5m	4.8m-13.5m	5.6m-15.0m
Angle 30°	2.1m-4.5m	2.1m-4.5m	2.1m-4.5m	2.7m-5.0m	3.3m-7.0m	3.7m-8.0m	4.0m-9.0m	4.8m-11.0m




**SPACE-RAY**  
**RADIANT TUBE HEATING**

GAS FIRED PRODUCTS (UK) LTD Chapel Lane, Claydon, Ipswich, Suffolk IP6 0JL.  
 Tel: 01473 830551 Fax: 01473 832055 Email: info@spaceray.co.uk Website: www.spaceray.co.uk